

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

THE WORLD INTELLECTUAL PROPERTY ORGANIZATION
IS A SPECIAL AGENCY OF THE UNITED NATIONS
FOR THE CO-ORDINATION AND UNIFICATION OF
THE PROTECTION OF PATENTS AND OTHER
INTELLECTUAL PROPERTY RIGHTS

(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/33869 A2

(51) International Patent Classification: H04Q 7/00

(21) International Application Number: PCT/EP00/10909

(22) International Filing Date:
2 November 2000 (02.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9926069.7 3 November 1999 (03.11.1999) GB(71) Applicant (for all designated States except US): NOKIA
NETWORKS OY (FI/FI); Keilalahdentie 4, FIN-02150
Espoo (FI).


(72) Inventor; and

(75) Inventor/Applicant (for US only): MÄKINEN, Teemu
(FI/FI); Tanhunsentie 23 B 1, FIN-04420 Järvenpää (FI).(74) Agents: RUUSKANEN, Juha-Pekka et al.; Page White
& Farrer, 54 Doughty Street, London WC1N 2LS (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished
upon receipt of that report.For two-letter codes and other abbreviations, refer to the "Guidance
Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: RELOCATION OF COMMUNICATION SERVICES

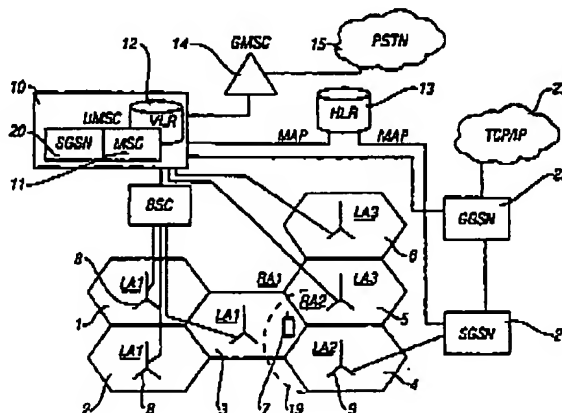

(57) Abstract: The present invention relates to a method, a communications system and a network element for providing communication services for a mobile station. The mobile station is arranged to use at least two different communication services provided by the communications system. The communications system comprises a first network element and a second network element for controlling the communication services provided for the mobile station. The mobile station may communicate by using at least two different communication services under the control of the first network element. The method comprises initiating relocation of the control of at least one of said communication services from the first network element to the second network element, whereafter a message is sent to the first network element. The message includes information based on which it is possible to selectively relocate said at least one communication service to the second network element. Said at least one communication service is then selectively relocated from the first network element to the second network element based on the information.

WO 01/33869 A2

WO 01/33869

PCT/EP00/10909

1

Relocation of communication services**Field of the Invention**

- 5 The present invention relates to relocation of communication services in a communication system and in particular, but not exclusively, to relocation of one or more communication services from a network element of a cellular communication system, the element being arranged to provide control of at
10 least two different communication services provided for a mobile station.

Background of the Invention

- 15 Communication networks typically operate in accordance with a given standard which sets out what the various elements of the network are permitted to do and how that should be achieved. The given standard also defines the types of connections by means of which the communication service is provided for a
20 subscriber of the communication network. For example, the standard defines whether the subscriber or more precisely, a subscriber terminal is provided with a circuit switched service or a packet switched service for communication, and also the manner how the circuit switched or the packet
25 switched service is to be implemented. Thus the various standards define several different "rules" for communication. The rules are often referred to as protocols. The protocols may be used for controlling various events and functionalities in a connection provided through the communications network.
30 Several protocols may be simultaneously in an active state for providing control of a connection.

WO 01/33869

PCT/EP00/10909

2

A subscriber terminal that is to be used for communication over the given communication network has to be implemented in accordance with the standard. A subscriber terminal may also be arranged to be compatible with more than one standard, i.e. the terminal may use several different types of services for communication. It is also possible to have several communication connections based on different standards at the same time. For example, a terminal may simultaneously communicate in parallel through a circuit switched (CS) connection and a packet switched (PS) connection.

A communication network is a cellular radio network consisting of cells. In most cases the cell can be defined as a certain area covered by one or several base transceiver stations (BTS) serving mobile stations (MS) or similar user equipment (UE) via a radio interface and possibly connected to a base station subsystem (BSS). Several cells cover a larger area, and form typically a radio coverage area referred to as a location area (LA) or in some standards as a routing area (RA). It is noted that the size of the location area or routing area depends on the system and circumstances, and may equal to one cell or be even smaller, such a part of a coverage area of a base station.

A feature of the cellular system is that it provides mobility for the mobile stations, i.e. the mobile stations are enabled to move from a cell or location area to another, and even from a network to another network that is compatible with the standard the given mobile station is adapted to. Mobile stations having an active i.e. ongoing connection may also be relocated from the network apparatus of one location area to network apparatus of a new location area during an ongoing

WO 01/33869

PCT/EP00/10909

3

connection. This is enabled by a location management functionality that keeps record of the current locations of the mobile stations, and controls and proceeds the relocation of any ongoing connections between the mobile station and the
5 network apparatus.

A mobile station (MS) within a location area of a communications system may be controlled and a location management functionality may be provided by a controller node.
10 A cellular communications system also typically comprises a location register or several location registers for the location management purposes. The location area may be referred to as a servicing area of the given controller node. The location management functionality operates typically such
15 that whenever a mobile station enters a new location or routing area, the control of the connection is "relocated" from the "old" control node servicing the "old" location area to a "new" control node servicing the new location area, and all control in the "old" node is cancelled.

20 For example, in a circuit switched GSM (Global System for Mobile) network the controller functionality is provided by means of a mobile switching center (MSC) and the location information of a mobile station is maintained by appropriate
25 home location registers (HLR) and visitor location registers (VLR). In a general packet radio service (GPRS), that is an example of a packet switched cellular radio network, the service area of a GPRS may be controlled by means of a serving GPRS support node (SGSN). The SGSN corresponds substantially
30 to the MSC of the GSM, but is implemented to provide packet switched communication services. Although the packet switched networks may have location register functionality of their

own, the GPRS typically utilises the HLRs and VLRs of the GSM system. Other systems, such as the proposed CDMA (Code Division Multiple Access) or UMTS (Universal Mobile Telecommunications System) are also provided with appropriate
5 controller and location management functionalities.

One of the more recent proposals for the control of communications services is a combined or integrated network element providing control for both the packet switched
10 communication service and the circuit switched communication service. More precisely, a UMSC (=UMTS MSC) node has been proposed, said UMSC comprising both the MSC and the SGSN functionalities. A UMSC node is intended for providing a combined location management for the mobile stations within
15 its location area/routing area such that the location management may be provided for both the circuit and packet switched services by a single integrated element. The proposed integrated node or element may provide the location update procedure e.g. in a MAP (Mobile Application Part) protocol
20 based network environment. Thus the UMSC can be defined as a logical entity that originates and terminates combined MAP (Mobile Application Part) operation. The UMSC is arranged to utilise the VLR of the MSC. An integrated UMSC node typically refers to a physical node that includes the MSC/VLR and SGSN
25 logical entities. The signalling between these entities and/or other possible internal entities is arranged to occur within the integrated node. Thus the other network elements will see the integrated node as a single entity.

30 However, the inventor has found that if combined location management, such as the above referred integrated UMSC node, is used the location cancellation cannot separate different

WO 01/33869

PCT/EP00/10909

5

communication services (e.g. the packet switched (PS) connection and the circuit switched (CS) connection) that may be provided simultaneously by means of the integrated node for the subscriber. This applies even if the circuit switched

5 communication service and the packet switched communication service each have their own, from each other independent location update messages. The inventor has found that a problem arises especially in a situation where only one of the services (e.g. only the CS service or only the PS service) is

10 to be relocated to a "new" location/routing area and thus to a "new" control node while the other remains in the "old" service area and should thus be controlled by the "old" node. More precisely, even though the old node receives the cancel location message, the old node does not know which one of the

15 connections is to be relocated. A cancel location message may lead to deletion of all connections from the old integrated node or to other undesired situation in the system. The cancellation of all connections may occur, even though the situation may well be such that at least one of the

20 connections should still be maintained in the old node despite the relocation of one or several other connections.

Summary of the Invention

25 It is an aim of the embodiments of the present invention to address one or several of the above problems.

According to one aspect of the present invention, there is provided a method in a communications system providing

30 communication services for a mobile station, the mobile station being arranged to use at least two different communication services provided by the communications system

and the communications system comprising a first network element and a second network element for controlling the communication services provided for the mobile station, wherein the mobile station communicates by using at least two
5 different communication services under the control of the first network element, comprising the subsequent steps of:

- initiating relocation of the control of at least one of said communication services from the first network element to the second network element;
- 10 sending a message to the first network element, said message including information based on which it is possible to selectively relocate said at least one communication service to the second network element; and
- selectively relocating said at least one communication
15 service from the first network element to the second network element based on the information.

The first network element may be arranged to provide circuit switched communication services and packet switched
20 communication services for the mobile station. The first network element may also provide combined location management for the at least two communication services before the relocation is initiated, and, after said at least one communication service is relocated, the first network element
25 may provide location management for those communication services only that were not relocated.

According to another aspect of the present invention there is provided a communications system for providing communication
30 services for a mobile station, the communications system providing the mobile station with at least two different communication services, the communications system comprising:

WO 01/33869

PCT/EP00/10909

7

a first network element for controlling the at least two communication services provided for the mobile station for communication;

means for initiating relocation of the control of at
5 least one of said communication services from the first network element to a second network element; and

means for sending a message to the first network element, said message including information based on which it is possible to selectively relocate said at least one
10 communication service to the second network element, wherein the first network element is arranged to selectively cancel its control of the communication services based on the information.

15 According to another aspect of the present invention there is provided an integrated node in a communications system for providing a mobile station with at least two different communication services, comprising:

means for controlling a first communication service
20 provided for the mobile station for communication;

means for controlling a second communication service provided for the mobile station for communication; and

means for processing a message from the communication system, said message including information based on which it
25 is possible to selectively relocate one or several of the communication services to a second network element, wherein the integrated node is arranged to selectively cancel its control of the communication services to be relocated based on the information.

30

The embodiments of the invention provide several advantages.

WO 01/33869

PCT/EP00/10909

8

One of the benefits is that it may enable selective relocation of only one or some of the ongoing communication services handled by an integrated controller entity while the remaining connection or connections may continue and a disconnection of
5 any communication services may be avoided.

Brief Description of Drawings

For better understanding of the present invention, reference
10 will now be made by way of example to the accompanying drawings in which:

Figure 1 shows Figure 1 shows a schematic diagram of a cellular radio network system in which embodiments of the invention can be implemented;

15 Figure 2 is a flowchart illustrating the operation of one embodiment of the present invention; and

Figure 3 is an information flow chart in accordance with an embodiment of the present invention.

20 Description of Preferred Embodiments of the Invention

Reference will first be made to Figure 1 illustrating a general view of one possible cellular communications system. It is noted that even though the exemplifying
25 telecommunications system shown and described in more detail in the following uses the terminology of a circuit switched GSM (Global System for Mobile communications) public land mobile network (PLMN) and a packet switched UMTS (Universal Mobile Telecommunications System) services, the proposed
30 solution can be analogously used in any system providing communication services between a transmitting station and a receiving station and a possibility to offer at least two

WO 01/33869

PCT/EP00/10909

9

different types of communication services for a mobile station or other corresponding user equipment.

Number of cells of the communications system are illustrated.

- 5 Each of the cells 1 to 6 comprises a respective base transceiver station (BTS) 8,9. It should be appreciated that in practise the shape of the cells deviates from the shown, e.g. because of geographical reasons and/or blocking obstacles and that the radio coverage areas of the neighbouring cells
- 10 typically overlap. Each base transceiver station BTS is arranged to transmit signals to and receive signals from the mobile station (MS) 7 in the cell. Likewise, the mobile station 7 is able to transmit signals to and receive signals from the respective base transceiver station. The mobile
- 15 station 7 accomplishes this via wireless communication with the base stations. Typically a number of mobile stations will be in communication with each base station although only one mobile station is shown in Figure 1 for clarity.
- 20 Several cells are typically grouped such that one location area comprises more than one cell. For example, URA (UMTS Terrestrial Radio Access Network Registration Area) in the UMTS standard consist of a group of cells. In the example two GSM location areas LA1, LA2 and LA3 are shown, wherein LA1
- 25 comprises cells 1 to 3, LA2 comprises cell 4 and LA3 comprises cells 5 and 6. As will be explained later in more detail, the location/routing areas of the different standards may also differ geographically from each other and/or the location areas or routing areas may overlap. Therefore the GSM location
- 30 areas LA1, LA2 and LA3 are not necessarily the same as what are the location or routing areas for a packet switched service, although the both services may be provided with the

WO 01/33869

PCT/EP00/10909

10

same network elements. The "border line" between two routing areas RA1 and RA2 of the exemplifying packet switched service is illustrated by the dashed line 19. It is noted that the RA of a packet switched service may be smaller from the size thereof than a LA of a circuit switched service or vice versa. In any case, the differently sized service areas of the different communication services may lead into situation that the in parallel used services may be controlled by separate nodes, and/or that in some situations the other one of the services should be cancelled later than the other one.

Each of the base stations 8,9 is controlled by a respective controller entity. The communications system may includes an integrated network control node, which in the example of Figure 1 comprises UMSC (UMTS MSC) 10. The integrated node 10 provides control for both the circuit switched part and the packet switched part of the services provided for the mobile station 7. Conventionally the different services have been controlled by a separate MSC and a separate SGSN, respectively. Therefore, before explaining the operation of the integrated node 10 in more detail, the operation of a MSC and a SGSN will be briefly explained as they both were a separate entity.

In the GSM system the base stations are typically connected to a base station controller BSC or a radio network controller (RNC) that is connected further to a Mobile Switching Center (MSC). It is noted that for the reasons of clarity Figure 1 does not show any separate MSCs in addition to the MSC functionality 11 integrated within the UMSC 10, although the system could be provided with such as well (e.g. for controlling the cell 4). As is also shown by Figure 1, in some

WO 01/33869

PCT/EP00/10909

11

arrangements the base station controller BSC controlling one or several base stations between the network controller and the base stations can be omitted. The MSC may be connected to other elements or parts of the telecommunications system, such as a Public Switched Telephone Network (PSTN) 15, via a suitable linking or gateway apparatus, such as Gateway Mobile Switching Center (GMSC) 14.

In addition to the conventional circuit switched telephone services implemented by means of the GSM standard, Figure 1 also illustrates the possibility of using a packet switched communications service, e.g. for communication with a data network 23. The illustrated GPRS (General Packet Radio Service) may be based on the GSM technology and it may use the existing GSM base stations for its operation. The GPRS typically comprises a serving GPRS support node (SGSN) 21 corresponding substantially to the MSC of the GSM network for controlling the given location/routing area and a gateway GPRS support node (GGSN) 22 for interfacing with the data network, for example the TCP/IP (Transport Control Protocol/Internet Protocol) Internet 23. In the GPRS system the network controller SGSN 21 is arranged to pass on data packets to be transmitted to the mobile station 7 by the respective base station. The controller will also receive from the base station packets of data which it has received from the mobile station.

Thus, regardless the standard, each of the network controllers controls the associated location areas, either directly or via the base station controller. It is noted that typically more than two network controllers, such as the integrated UMSC node or a separate MSC or SGSN nodes, are provided in a network.

WO 01/33869

PCT/EP00/10909

12

Before explaining the operation of the integrated UMSC node 10, functionalities that are required to enable roaming of the mobile station 7 are also briefly explained. The mobile station 7 is able to move from one location area to another location area, e.g. from cell 3 to cell 4 or from one cell group to another cell group. The location area of the mobile station 7 may thus vary in time as the mobile station is free to move from one location (radio coverage area) to another location (to another coverage area) and also within one coverage area. To ensure proper operation of the system and to avoid disconnecting a possibly ongoing connection, handover procedures are provided so that all necessary information will become available for the parties involved (e.g. for the previous and new network controller). The mobile station may also be in communication with more than one base station, e.g. during a so called soft handoff procedure.

In order to be able to control a roaming mobile station that may communicate with different base stations of the mobile telecommunications network the mobile station is registered permanently to a particular home location register (HLR) and temporarily to a visitor location register (VLR). In the example of Figure 1 the mobile telecommunications network comprises a stand-alone home location register 13. A visitor location register (VLR) 12 is comprised in the MSC 11 part of the UMSC node 10. The mobile station 7 of Figure 1 within cell 3 is registered both in the HLR 13 of the mobile telecommunications network and in the VLR 11 of the visited location area. It is noted that a mobile telecommunications network may include several home location registers and that instead of being a stand-alone element, the home location

WO 01/33869

PCT/EP00/10909

13

register may be included in one of the network controllers. The home and visitor location registers can communicate with each other e.g. over a MAP (Mobile Application Part) interface or any other suitable interface.

5

The arrangement is typically such that the MS 7 is registered permanently to the HLR 13. The HLR 13 centrally and permanently stores all subscriber information associated with the particular MS 7, including the location area information that is required for enabling the location management of roaming mobile stations. In other words, the HLR 13 keeps centrally track of the location of the mobile station 7 for the location and call routing purposes. The VLR 12 is used for storing information relating to the mobile stations visiting the service area of the MSC associated with the VLR. The visited VLR is capable of providing the HLR with location information concerning the current location of the MS 7 and any possible updates of the location information.

20 The integrated UMSC node 10 of Figure 1 comprises a MSC part 11 including a VLR 12 and a SGSN part 20. The UMSC functionality of the node 10 is arranged to perform combined location update procedure (relocation) in a MAP protocol based network. The internal parts of the integrated node 10 are connected by an internal interface, whereby it is possible to optimise of the signalling traffic of the messages between the internal entities of the node 10.

30 The other elements of the system, including the HLR 13, see and handle the integrated node 10 as a single unit. The integrated node 10 also has a single address. More precisely, the HLR handles the integrated node 10 as the UMSC part.

WO 01/33869

PCT/EP00/10909

14

Therefore the HLR handles all information and messages from or to the integrated node 10 as information and messages from or to the UMSC part, without any knowledge whether the information is associated with the MSC part 11 or the SGSN part 20 of the integrated node.

However, the above described arrangement of the integrated node 10 may also cause a problem when combined location management is used in a communications system providing more than one communication services, such as circuit switched and packet switched services. More precisely, the inventor has found that when a need for relocation of only a part of the communication services arises, a location cancellation message that is sent from the HLR 13 to the integrated node 10 cannot selectively cancel the service or services to be relocated. In Figure 1 the integrated node 10 does not know whether the circuit switched service or the packet switched service should be cancelled from the node 10, and thus both services will become cancelled. This may not be desired in all instances. For example, it may be that the circuit switched (CS) service will still be provided for the mobile station in Figure 1 by the cell 3. However, the mobile station 7 may have moved from the PS routing area RA1 into a new PS routing area RA2 beyond the dashed line 19. The new PS routing area is serviced by the base station 9 and overlaps the CS location area LA1 provided by the cell 3. Thus the radio interface for the packet switched services should be handled by the "new" base station 9 and "new" SGSN 21 while the radio interface for the circuit switched service should still be handled by the "old" base station of cell 3 and the "old" controller 10. The following will describe, with reference to all Figures 1, 2 and 3, a procedure by means which it is possible to relocate only a

WO 01/33869

PCT/EP00/10909

15

part of the connections from the integrated node 10 to the new control node 21 while the remaining parts of the connection will still be handled by the integrated node 10. The numbers in parentheses refer to the numbering of the signalling flow chart of Figure 3.

When the mobile station 7 moves beyond the dashed line 19 indicating the border line between two PS routing areas RA1 and RA2, wherein the latter is provided by the base station 9, the mobile station 7 sends a 'Routing Area Update Request' (1) message to the new SGSN 21 connected to the base station 9. The message may include information such as and old RAI (Routing Area Identity), old P-TMSI (Packet - Temporarily Mobile Subscriber Identity) signature, and the type of the update. The type of the update information is typically used for indicating a combined LA/RA (Location Area/Routing Area) update. If the mobile station wants to perform an IMSI (International Mobile Subscriber Identity) attach, then the update type is used for indicating a combined LA/RA (Location Area/Routing Area) update together with the IMSI attach. After the new SGSN has received the message (1), it will generate and transmit a 'SGSN Content Request' (2) message to the old SGSN, which in Figure 1 would be the integrated node 10. The message (2) includes information of the old RAI, old P-TMSI Signature and the address of the new SGSN 21. The new SGSN 21 sends the message (2) in order to receive information such as a MM (Mobility Management) Context and PDP (Packet Data Protocol) context from the old controller entity, i.e. from the integrated node 10. The integrated node 10 sends then an appropriate response (3) providing the new SGSN 21 with the requested information. After this stage some security functions may be executed (4).

WO 01/33869

PCT/EP00/10909

16

The new SGSN 21 sends subsequently a 'GPRS Update Location' (5) message to the HLR 13. The message (5) may include information such as the new SGSN number and address and the IMSI of the mobile station. As response, the HLR 13 generates and sends a 'Cancel Location' (6) message to the integrated node 10. The message (6) may include the IMSI of the mobile station 7, and information concerning the cancellation procedure and the type of the service that is to be cancelled. The latter information defines the connection or service type that is to be cancelled.

According to an embodiment three different alternative indications (if the above discussed two types of communication services are provided for the mobile station) may be included into the message (6) from the HLR: a) delete the packet switched service only, b) delete the circuit switched service only, c) delete both the circuit switched service and the packet switched service. The indications may, naturally, also be opposite, i.e.: a) continue with the packet switched service only, b) continue with the circuit switched service only, c) continue with both the circuit switched service and the packet switched service. In other words, the cancel location message (6) sent from the HLR 13 to the integrated node 10 includes information of the service that is to be cancelled so that the integrated node cancels only those services that are no longer under its location area instead of deletion the whole subscriber. The information may be a clear instruction to cancel a service. The integrated node 10 may also, based on this information, internally make the required decision and cancel those services that it concluded as the ones to be deleted.

WO 01/33869

PCT/EP00/10909

17

The integrated node will then send a 'Cancel Location Ack' (7) message to the HLR 13 to acknowledge the receipt of the instruction to delete one or more of the services previously
5 handled by the old integrated node 10. The HLR will then send an 'Insert Subscriber Data' (8) message to the new SGSN 21. The message (8) may include information such as the IMSI of the mobile station 7 and any relevant GPRS subscription data. The new SGSN 21 acknowledges this by a 'Insert Subscriber Data
10 Ack' (9) message. Finally, the HLR 13 acknowledges the 'GPRS Update Location' (5) message by an acknowledgement message (10).

The embodiment of the present invention has been described in
15 the context of a system employing a packet switched service and a circuit switched service. This invention is also applicable to any other environments, e.g. when two different packet switched services are simultaneously employed. In addition, the need to relocate a communication service may
20 also be caused by another reasons than roaming, e.g. by a failure in the system or by overload. The relocation may also occur to another integrated node instead of a separated or conventional single mode node. In addition, instead of the HLR, the information concerning the communication services and
25 provided to the integrated node may be generated by other network elements as well. According to an alternative the required information is included e.g. in the 'Content Request' (2) message send by the new controller to the integrated node.

30 It should also be appreciated that whilst embodiments of the present invention have been described in relation to mobile stations, embodiments of the present invention are applicable

to any other suitable type of user equipment. It should also be appreciated that base stations can sometimes be referred to as node B (e.g. in the UMTS standard).

- 5 It is also noted herein that while the above describes exemplifying embodiments of the invention, there are several variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims. —

WO 01/33869

PCT/EP00/10909

19

Claims

1. A method in a communications system providing communication services for a mobile station, the mobile station being arranged to use at least two different communication services provided by the communications system and the communications system comprising a first network element and a second network element for controlling the communication services provided for the mobile station, wherein the mobile station communicates by using at least two different communication services under the control of the first network element, comprising the subsequent steps of:
 - initiating relocation of the control of at least one of said communication services from the first network element to the second network element;
 - sending a message to the first network element, said message including information based on which it is possible to selectively relocate said at least one communication service to the second network element; and
 - selectively relocating said at least one communication service from the first network element to the second network element based on the information.
2. A method according to claim 1, wherein the first network element provides circuit switched communication services and packet switched communication services for the mobile station.
3. A method according to claim 1 or 2, wherein the mobile station initiates the relocation by moving from a first area serviced by the first network element to a second area serviced by the second network element and at least one of the

WO 01/33869

PCT/EP00/10909

20

communications services is serviced by the first network element in both areas.

4. A method according to any of the preceding claims,
5 wherein the first network element provides combined location management for the at least two communication services before the relocation is initiated, and, after said at least one communication service is relocated, the first network element
10 provides location management for those communication services only that were not relocated.

5. A method according to any of the preceding claims,
wherein the message is generated and send to the first network element by a location register of the communication system,
15 the location register being arranged to store location area information concerning the mobile station.

6. A method according to claim 5, wherein the interface between the location register and the first network element is
20 based on a mobile application part protocol.

7. A method according to any of the preceding claims,
wherein the first network element comprises an integrated switching center providing control functionality for at least
25 two different communication services.

8. A method according to claim 7, wherein the integrated switching center comprises a mobile switching center functionality for circuit switched communication services and
30 a serving general packet radio service support node for packet switched communications services.

WO 01/33869

PCT/EP00/10909

21

9. A communications system for providing communication services for a mobile station, the communications system providing the mobile station with at least two different communication services, the communications system comprising:

5 a first network element for controlling the at least two communication services provided for the mobile station for communication;

means for initiating relocation of the control of at least one of said communication services from the first
10 network element to a second network element; and

means for sending a message to the first network element, said message including information based on which it is possible to selectively relocate said at least one communication service to the second network element, wherein
15 the first network element is arranged to selectively cancel its control of the communication services based on the information.

10. A communications system according to claim 9, wherein the
20 first network element is arranged to provide circuit switched communication services and packet switched communication services for the mobile station.

11. A communications system according to claim 9 or 10,
25 wherein the service areas of the network elements of said at least two communication services are different from each other.

12. A communications system according to any of the preceding
30 claims 9 to 11, wherein the arrangement is such that the first network element provides combined location management for the at least two communication services before the relocation is

WO 01/33869

PCT/EP00/10909

22

initiated, and, subsequent to relocation of at least one communication service, the first network element provides location management for those communication services only that were not relocated.

- 5 13. A communications system according to any of the preceding claims 9 to 12, comprising a location register that is arranged to store location area information concerning the mobile station and to generate and transmit the message to the first network element.

10

14. A communications system according to claim 13, wherein the second network element is arranged to communicate with the location register.

- 15 15. A communications system according to claim 13 or 14, wherein the interface between the location register and the first and/or second network element is based on a mobile application part protocol.

- 20 16. A communications system according to any of the preceding claims 9 to 15, wherein the first network element comprises an integrated mobile switching center.

- 25 17. An integrated node in a communications system for providing a mobile station with at least two different communication services, comprising:

means for controlling a first communication service provided for the mobile station for communication;

- 30 means for controlling a second communication service provided for the mobile station for communication; and

means for processing a message from the communication system, said message including information based on which it


WO 01/33869

PCT/EP00/10909

23

is possible to selectively relocate one or several of the
communication services to a second network element, wherein
the integrated node is arranged to selectively cancel its
control of the communication services to be relocated based on
5 the information.

1/3

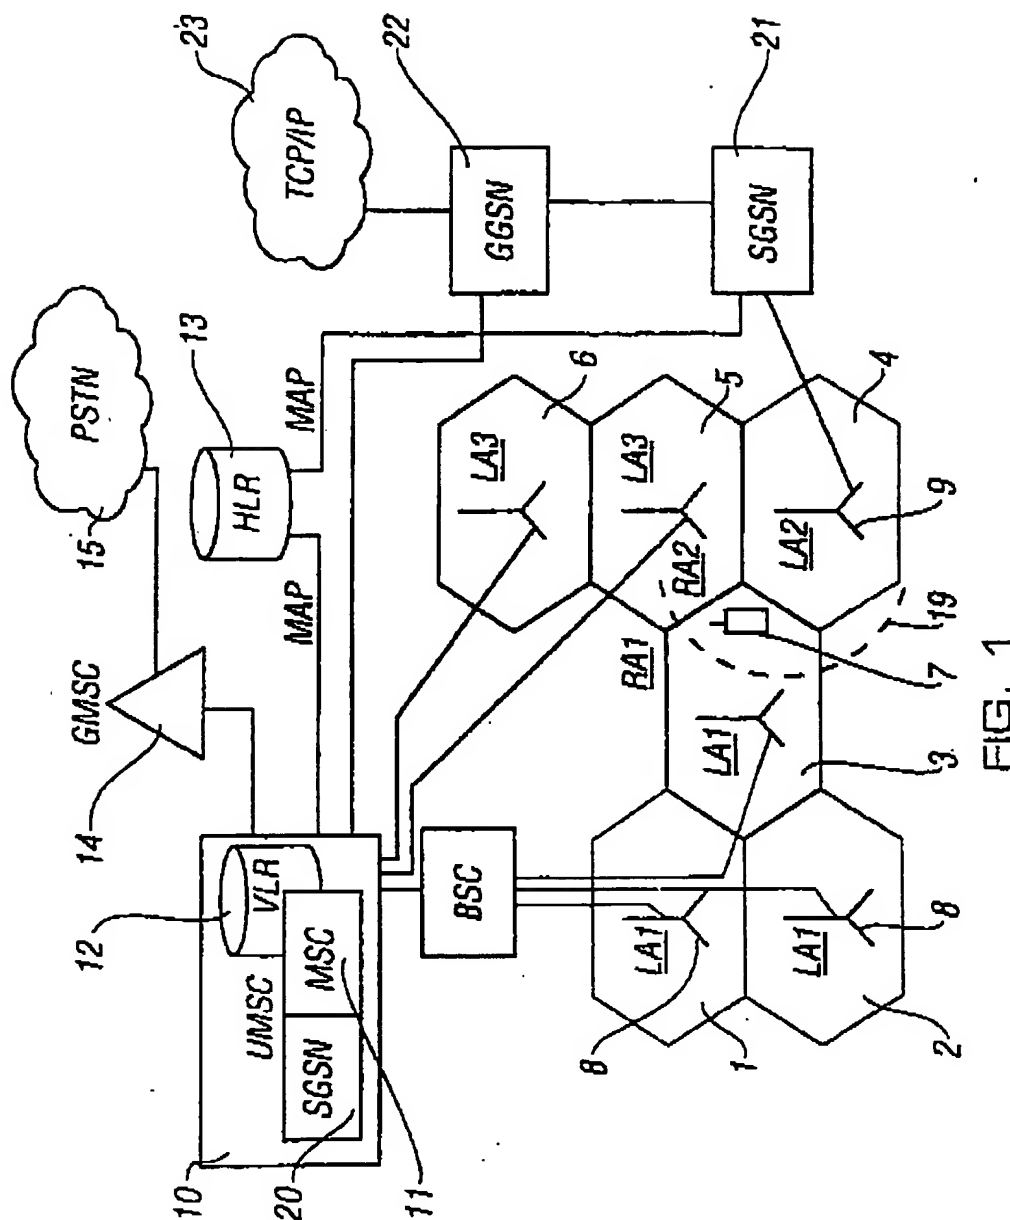

WO 01/33869

PCT/EP00/10909

2/3

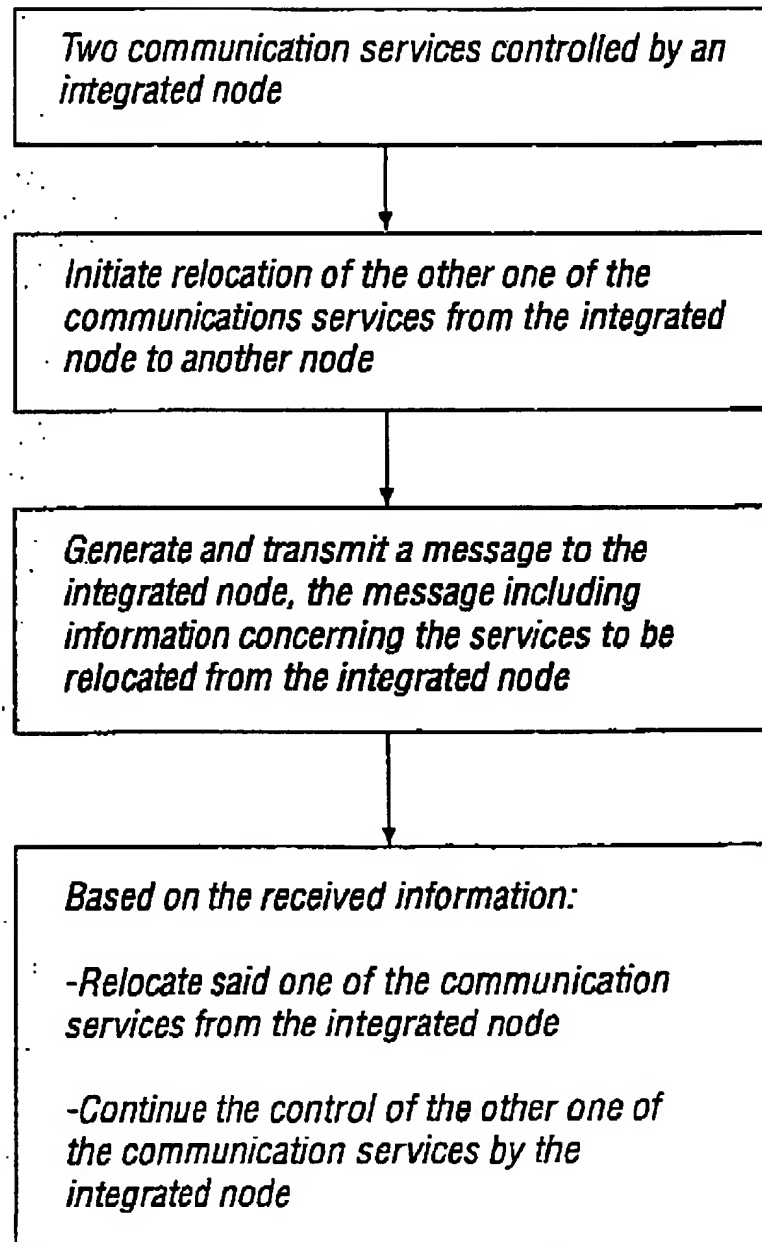


FIG. 2

WO 01/33869

PCT/EP00/10909

3/3

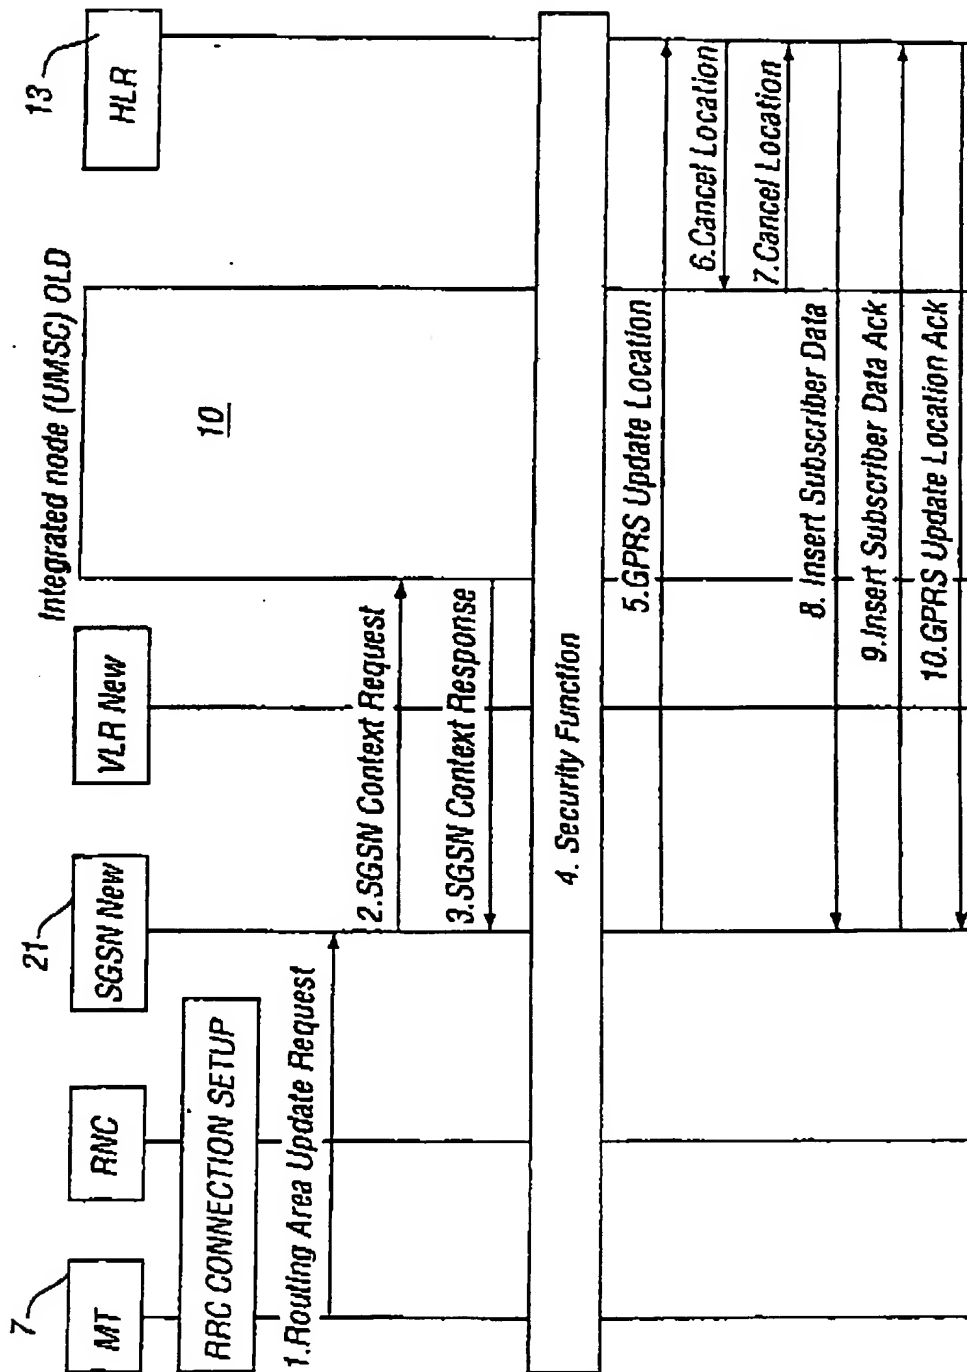


FIG. 3

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/33869 A3

(51) International Patent Classification: H04Q 7/22

(21) International Application Number: PCT/EP00/10909

(22) International Filing Date:
2 November 2000 (02.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9926069.7 3 November 1999 (03.11.1999) GB(71) Applicant (for all designated States except US): NOKIA
NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150
Espoo (FI).

(72) Inventor: and

(75) Inventor/Applicant (for US only): MÄKINEN, Teemu
[FI/FI]; Tanhunsentie 23 B 1, FIN-04420 Järvenpää (FI).(74) Agents: RUUSKANEN, Juha-Pekka et al.; Page White
& Farrer, 54 Doughty Street, London WC1N 2LS (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: RELOCATION OF COMMUNICATION SERVICES

Two communication services controlled by an
integrated nodeInitiate relocation of the other one of the
communications services from the integrated
node to another nodeGenerate and transmit a message to the
integrated node, the message including
information concerning the services to be
relocated from the integrated node

Based on the received information:

-Relocate said one of the communication
services from the integrated node-Continue the control of the other one of
the communication services by the
integrated node

(57) Abstract: The present invention relates to a method, a communications system and a network element for providing communication services for a mobile station. The mobile station is arranged to use at least two different communication services provided by the communications system. The communications system comprises a first network element and a second network element for controlling the communication services provided for the mobile station. The mobile station may communicate by using at least two different communication services under the control of the first network element. The method comprises initiating relocation of the control of at least one of said communication services from the first network element to the second network element, whereafter a message is sent to the first network element. The message includes information based on which it is possible to selectively relocate said at least one communication service to the second network element. Said at least one communication service is then selectively relocated from the first network element to the second network element based on the information.

WO 01/33869 A3

WO 01/33869 A3

(88) Date of publication of the international search report:
20 September 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Intr. National Application No.

PCT/EP 00/10909

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04Q/22		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04Q		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, INSPEC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 37721 A (NOKIA TELECOMMUNICATIONS OY ;SOEDERBACKA LAURI (FI); EINOLA HEIKKI) 27 August 1998 (1998-08-27) page 8, line 24 -page 13, line 27	1,9,17
A	WO 99 17579 A (NOKIA TELECOMMUNICATIONS OY ;VAINIKKA JARI (FI); KARI HANNU (FI);) 8 April 1999 (1999-04-08) page 6, line 30 -page 7, line 10 page 7, line 20 -page 9, line 2	1,9,17
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : 'A' document defining the general state of the art which is not considered to be of particular relevance 'E' earlier document but published on or after the international filing date 'L' documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) 'O' document referring to an oral disclosure, use, exhibition or other means 'P' document published prior to the international filing date but later than the priority date claimed 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. 'B' document member of the same patent family		
Date of the actual completion of the international search 20 April 2001		Date of mailing of the international search report 26/04/2001
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patatilaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3015		Authorized officer Tsapelis, A

2

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on parent family members

International Application No

PCT/EP 00/10909

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9837721 A	27-08-1998	FI 970705 A	20-08-1998
		FI 980351 A	20-08-1998
		AU 6216398 A	09-09-1998
		CN 1251249 T	19-04-2000
		EP 0962113 A	08-12-1999
		ZA 9801325 A	08-09-1998
WO 9917579 A	08-04-1999	FI 973846 A	31-03-1999
		AU 9352198 A	23-04-1999